


PURE ENERGY




Opustone[®]
STONE | TILE CONCEPTS




KAPPA

KAPPA WALL TILES ARE
COMPOSED OF 12 VIBRANT AND
SOLID COLORS WITH AN ARTISANAL
LOOK. THE TRIDIMENSIONAL
ELEMENT RAW AND THE 5 PENCILS
COMPLETE THE COLLECTION.
THE POSSIBILITY OF DIFFERENT
COMBINATIONS IS ENDLESS.
KAPPA IS PURE ENERGY.




Tangerine 2"x8" / White 2"x8" / Bordeaux 2"x8"







Nude 2"x8" / Lobster 2"x8" / Ocean 2"x8"







Mint 2"x8" / Green 2"x8" / Tuareg 2"x8" / Matita Cotto 7/16"x8"

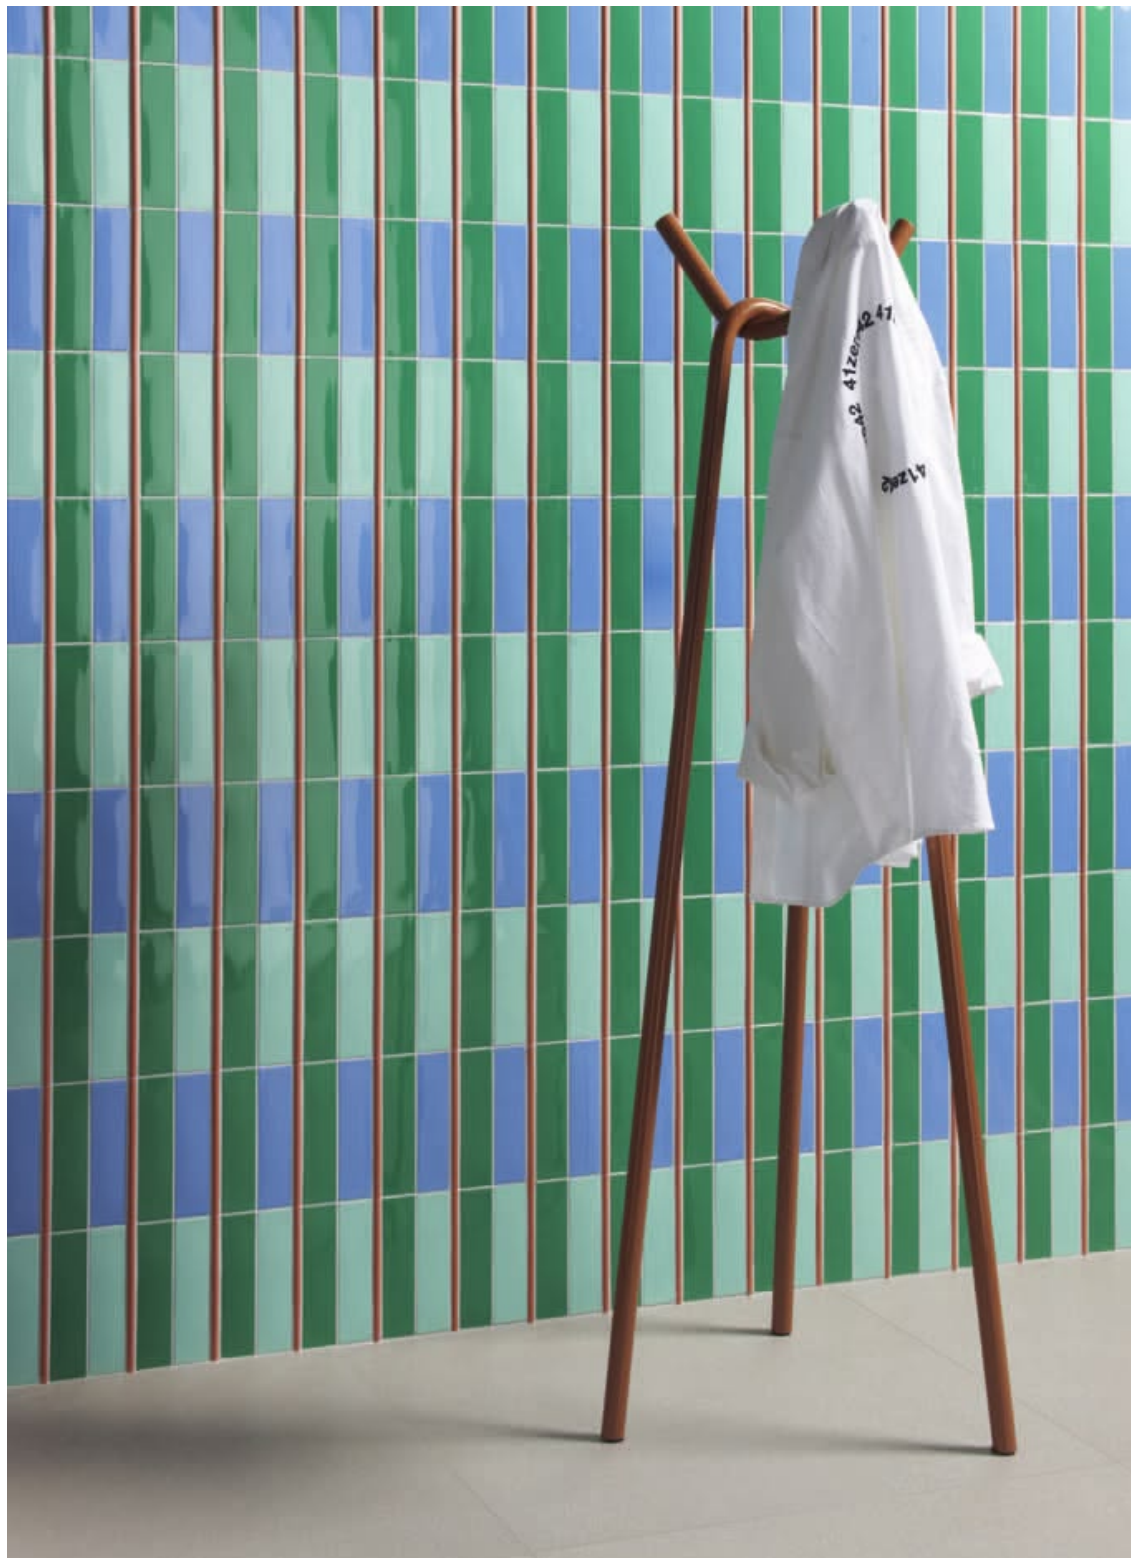




Mustard 2"x8

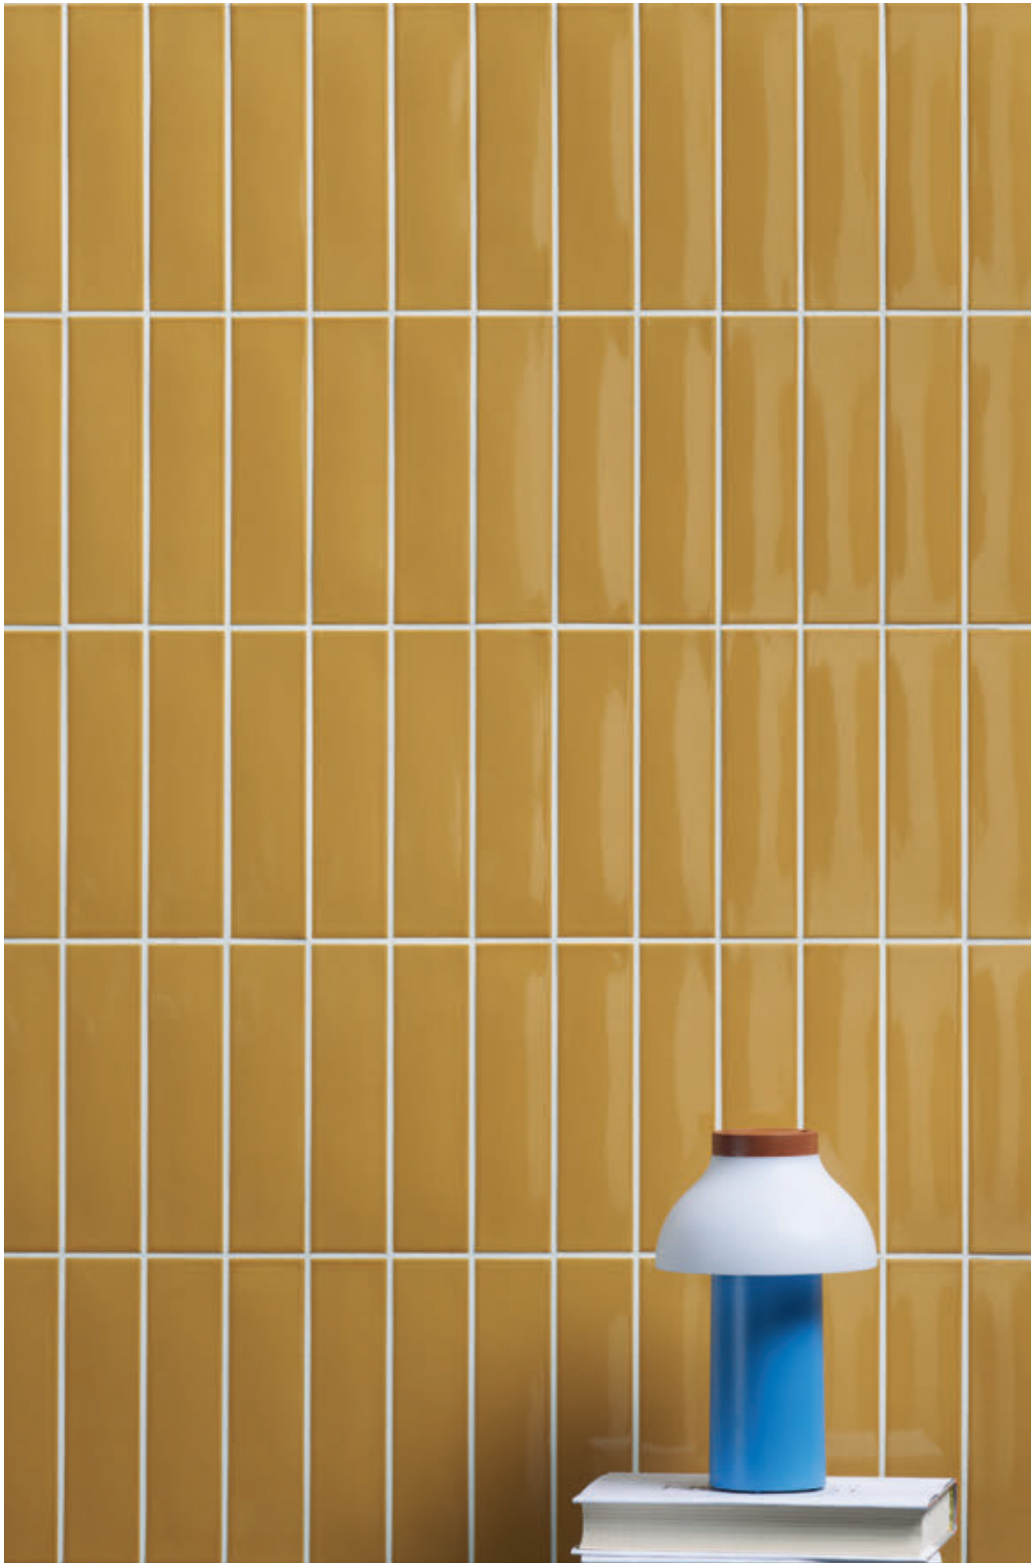




Ocean 2" x8"






Bordeaux 2"x8" / Musk 2"x8"






White 2"x8" / Raw 2"x8" / Lobster 2"x8"






Mint 2"x8" / Cacao 2"x8" / Raw 2"x8"






White 2"x8" / Matita Wood / Matita Aloe






Ocean 2"x8" / Nude 2"x8" / Matita Berry





Tangerine 2"x8" / Matita Lavender





TECHNICAL DETAILS

KAPPA

TECHNOLOGY **WHITE BODY SINGLE-FIRED WALL TILE KAPPA**

FINISH **POLISHED**

SIZE **2"x8"**

THICKNESS **8,5 MM**

A handcrafted look is given to the product through variable flatness, structured surface, non-uniform coating of glaze and small irregularities of the glaze. The same caliber of tiles is not always guaranteed. We recommend a joint of 2/3 mm suitable for natural products.

KAPPA COLORS



MUSTARD



TANGERINE



NUDE



LOBSTER



BORDEAUX



CACAO

RAW



GREEN



MINT



TUAREG




OCEAN



MUSK



WHITE



TECHNICAL DETAILS

MATITA

FINISH **POLISHED**

SIZE **7/16"x8"**

THICKNESS **11 MM**

*MADE OF UNGLAZED TERRACOTTA WITH AN APPLIED PROTECTION

**MADE OF NATURAL WOOD WITH AN APPLIED PROTECTION

THE WOOD PENCIL CAN BE USED FOR INTERIOR WALLS IN BOTH RESIDENTIAL AND PUBLIC SPACES, IT IS NOT RECOMMENDED TO USE IT FOR AREAS IN DIRECT CONTACT WITH WATER: SHOWERS, SAUNAS, POOL WALLS ETC.

MATITA COLORS



*COTTO



LAVENDER




BERRY



ALOE



**WOOD



KAPPA LAYING INSTRUCTIONS

Before starting the installation process, make sure that the surface is level and has been thoroughly cleaned. For proper installation, it is essential to use adhesives that are compliant and suitable for the intended purpose. For installations in humid environment, such as bathrooms and showers, it is highly recommended to properly waterproof the laying surface using specific products for this purpose to avoid any water infiltration. In case of cuts, take care in sealing the affected area with silicon so as to avoid any further water infiltration.

KAPPA TECHNICAL FEATURES

STANDARD	FEATURES	REQUIRED VALUE	KAPPA RAW
ISO 10545/2	SIZE		
	length and width	$\pm 0,5 \% \pm 2,0 \text{ mm}$	$\pm 0,5 \% \pm 2,0 \text{ mm}$
	thickness	$\pm 10 \% \pm 0,5 \text{ mm}$	$\pm 10 \% \pm 0,5 \text{ mm}$
	straightness of sides	$\pm 0,3 \% \pm 1,5 \text{ mm}$	$\pm 0,3 \% \pm 1,5 \text{ mm}$
	rectangularity	$\pm 0,5 \% \pm 2,0 \text{ mm}$	$\pm 0,5 \% \pm 2,0 \text{ mm}$
	flatness	$+ 0,5 \% + 2,0 \text{ mm}$ $- 0,3 \% - 1,5 \text{ mm}$	$+ 0,5 \% + 2,0 \text{ mm}$ $- 0,3 \% - 1,5 \text{ mm}$
ISO 10545/3	water absorption	$E > 10 \%$	16 %
ISO 10545/13	chemical resistance	no visible alteration	resistant
ASTM C650	chemical resistance		unaffected
ISO 10545/14	stain resistance	$\geq \text{CLASSE } 3$	≥ 4
ASTM C1378	stain resistance	$\geq \text{CLASSE } 3$	≥ 4
ISO 10545/11	crazing resistance	resistant	resistant

