


WHITE IS MY SUGAR!

41ZER042
SUPERCLASSICA
SCW


Opustone®
STONE | TILE CONCEPTS



SUPERCLASSICA SCW


WHITE IS MY SUGAR!

IT'S TIME FOR WHITE, SOFT AND
VERSATILE, AVAILABLE IN EIGHT
DIFFERENT FINISHES AND COME IN
SEVEN SIZES. SCW IS A WHITE
CANVAS READY TO BE MATCHED WITH
COLORS. THE SUPERCLASSICA RANGE IS
THUS EXPANDED, PERFECT FOR BOTH
RESIDENCIAL AND COMMERCIAL,
INDOOR AND OUTDOOR PROJECTS.
THE FAMILY KEEPS GROWING.




Honed 24"x24"






Natural 24"x48"







Hammered 24"x48"






Grooved 24"x48"

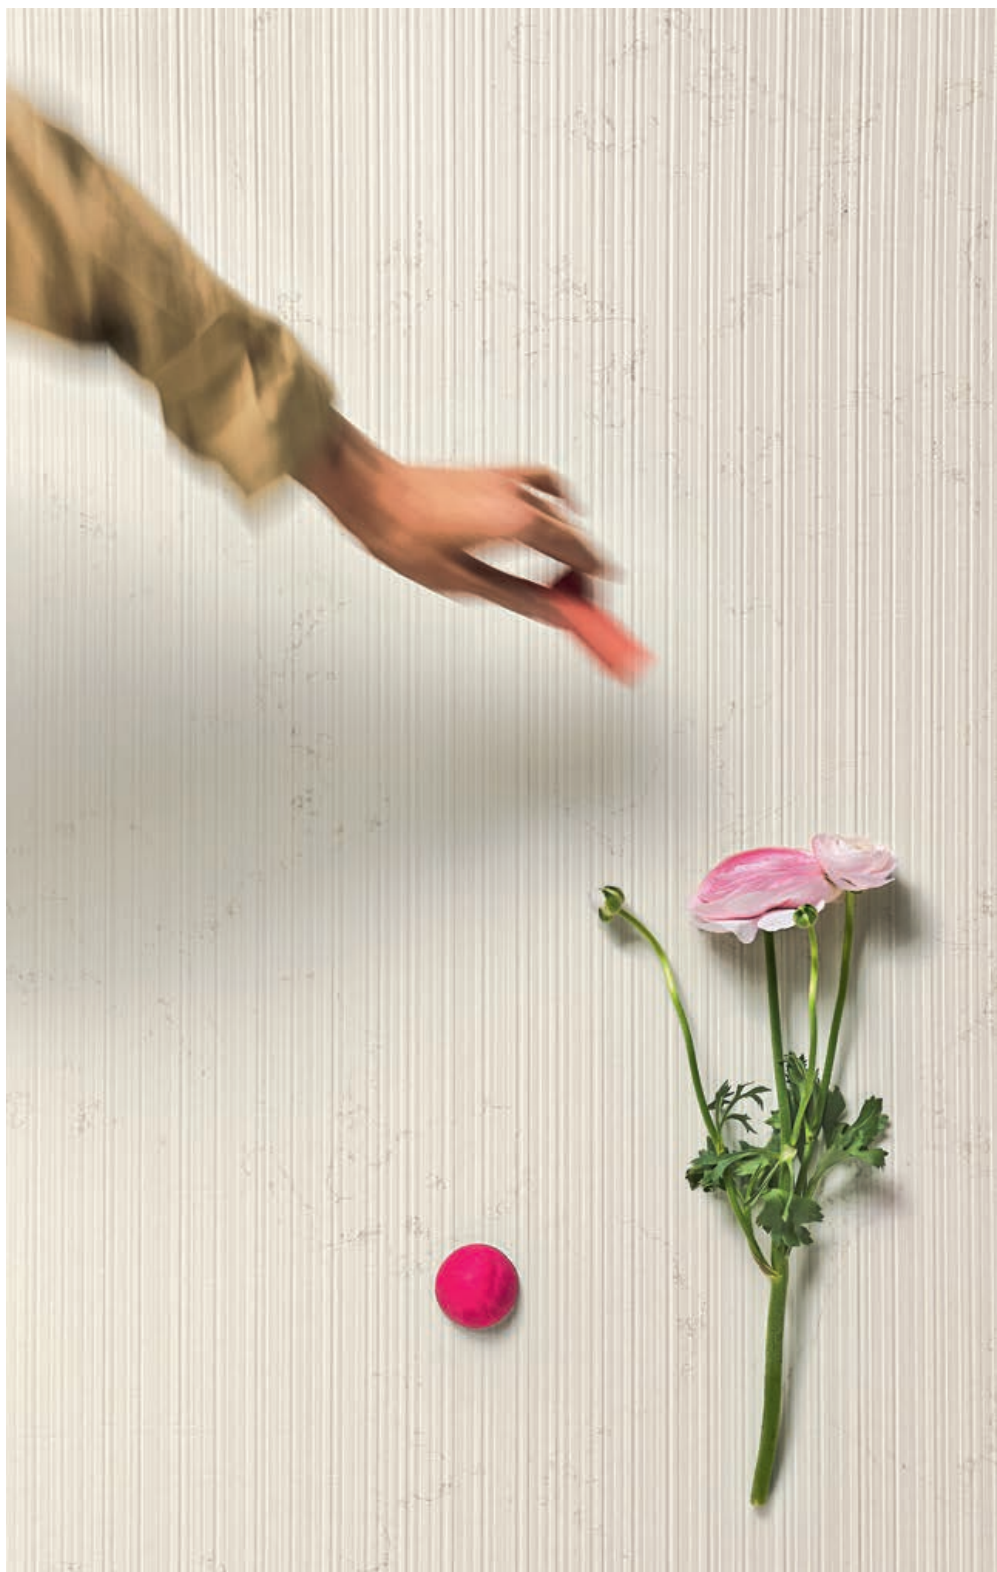




Happy 24"x48"






Mix 3"x24"







Hammered 24"x48"






Mix 3"x24"

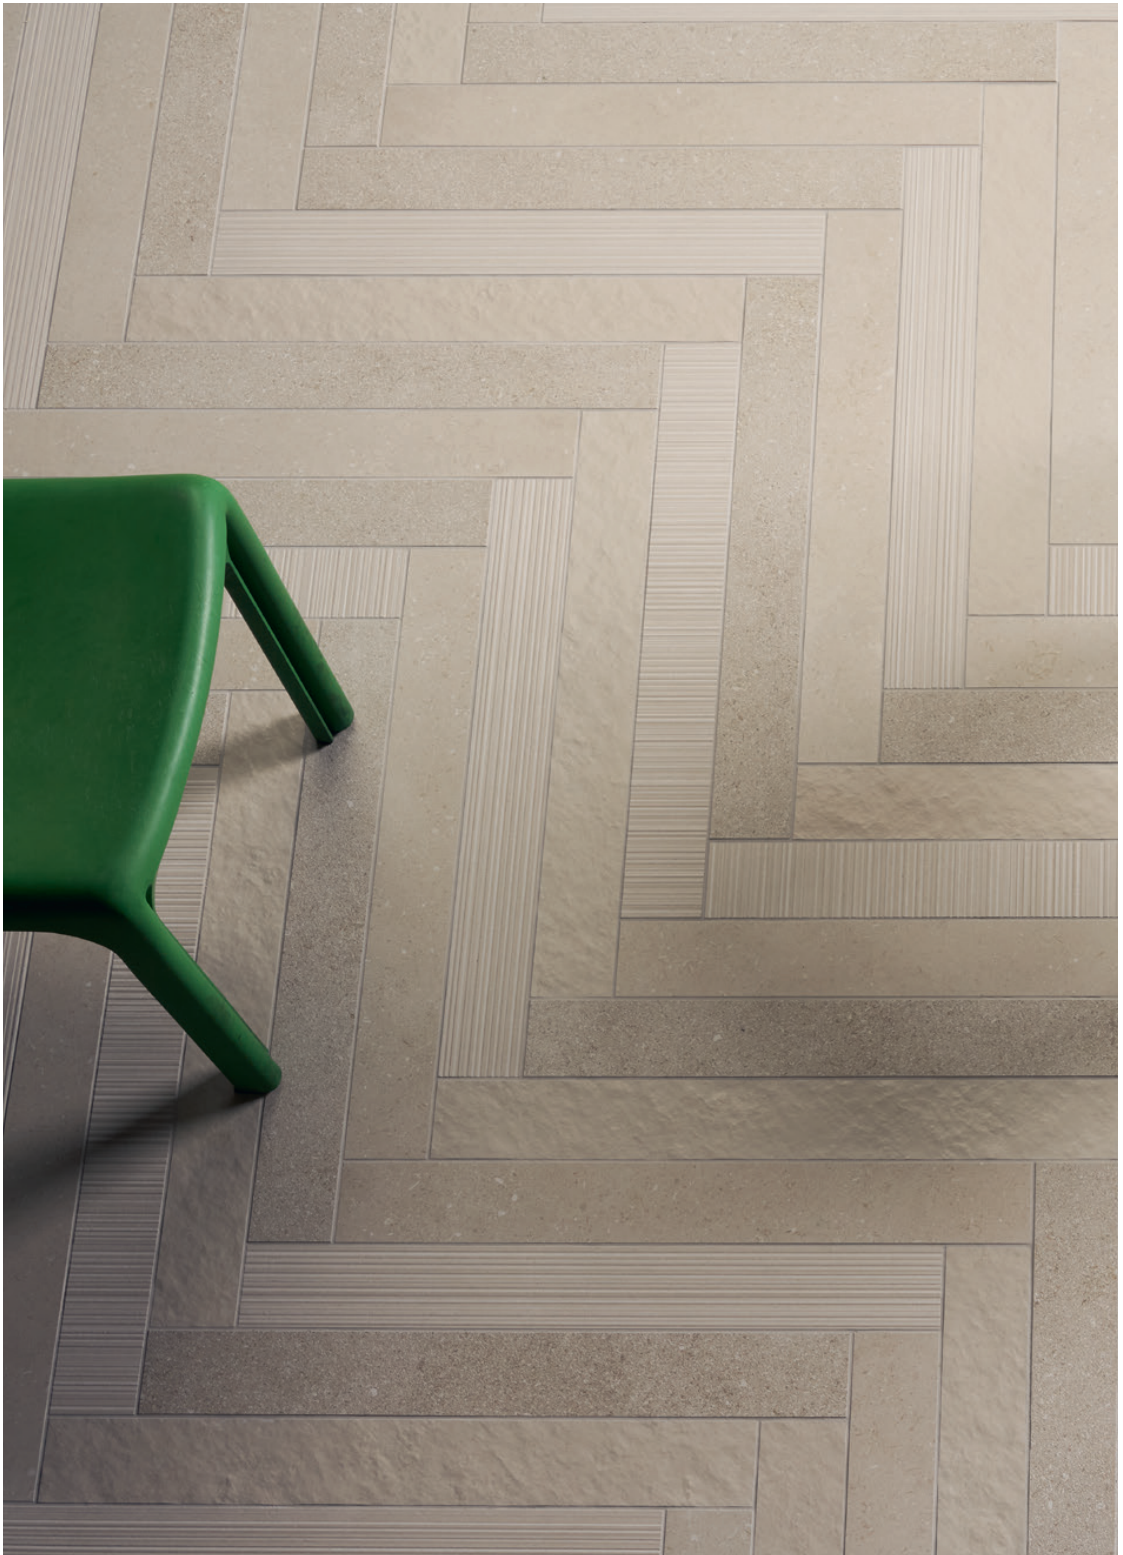




Polished 24" x 48"






Chevron 8"x82"





Mix 12"x12"





TECHNICAL DETAILS

SUPERCLASSICA SCW


TECHNOLOGY **HD DIGITAL COLORED BODY PORCELAIN**

FINISH **RECTIFIED**

NATURAL / FLAMED / HAMMERED / HONED / GROOVED / CHEVRON / POLISHED / HAPPY

THICKNESS **9 MM**

SCW SURFACES

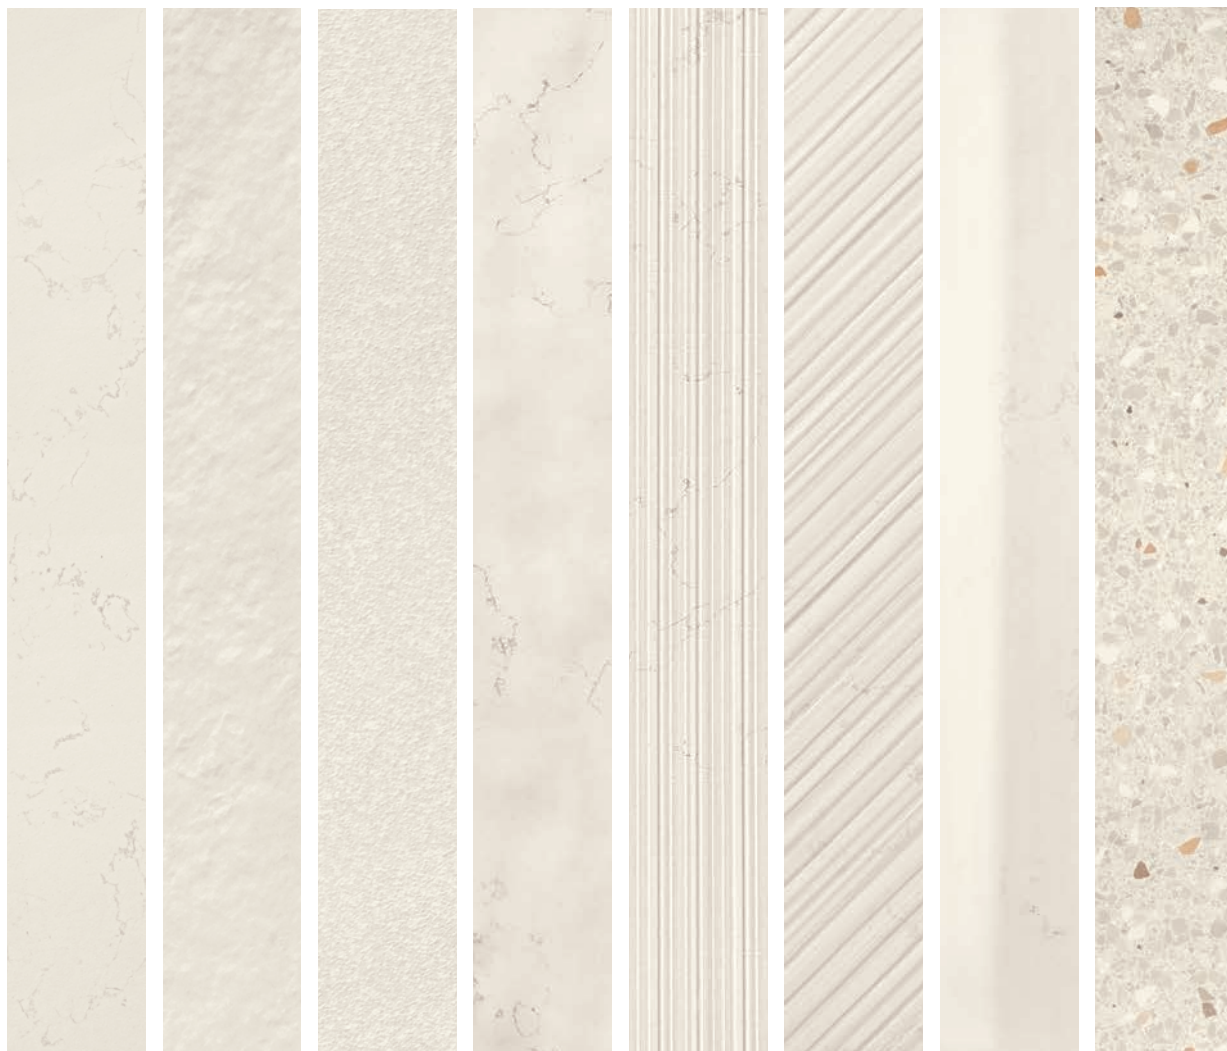

NATURAL

FLAMED

HAMMERED


HONED

GROOVED


CHEVRON

POLISHED

HAPPY




SCW SIZES

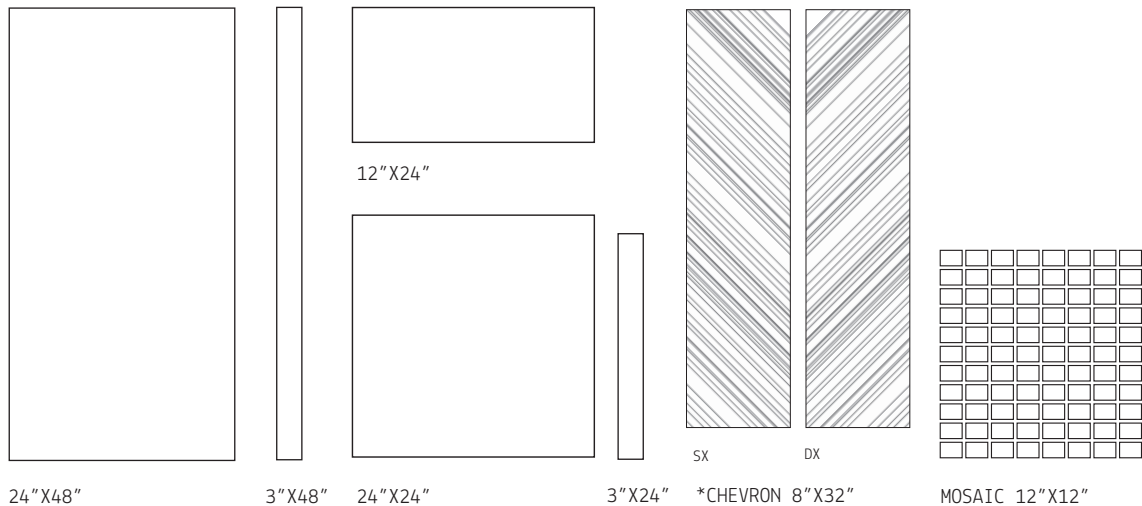


SCW SIZES AND TEXTURES

NATURAL




24" x 48"
12" x 24"
3" x 48"

POLISHED



24" x 48"

FLAMED



24" x 48"

HONED




24" x 24"

GROOVED




24" x 48"

HAMMERED




24" x 48"

CHEVRON



8" x 32"

HAPPY



24" x 48"


*MIX



MOSAIC 12" x 12"


*HAMMERED/GROOVED
NATURAL/FLAMED

**IN EVERY BOX THERE ARE 3 RIGHT PIECES AND 3 LEFT PIECES.*



SCW TECHNICAL FEATURES

STANDARD	FEATURES	REQUIRED VALUE	SUPERCLASSICA SCW
ISO 10545/2	SIZE		
	length and width	$\pm 0,6 \% / \pm 2 \text{ mm}$	$\pm 0,6 \% / \pm 2 \text{ mm}$
	thickness	$\pm 5 \% \pm 0,5 \text{ mm}$	$\pm 5 \% \pm 0,5 \text{ mm}$
	straightness of sides	$\pm 0,5 \% \pm 1,5 \text{ mm}$	$\pm 0,5 \% \pm 1,5 \text{ mm}$
	wedging	$\pm 0,5 \% \pm 2 \text{ mm}$	$\pm 0,5 \% \pm 2 \text{ mm}$
	flatness	$\pm 0,5 \% \pm 2 \text{ mm}$	$\pm 0,5 \% \pm 2 \text{ mm}$
ISO 10545/3	water absorption	$\leq 0,5 \%$	0,3 %
ASTM C373	water absorption	$\leq 0,5 \%$	meets the standards
ISO 10545/9	thermal shock	no visible alteration	resistant
ASTM C484	thermal shock	unaffected	unaffected
ISO 10545/12	frost/freeze resistance	no visible alteration	resistant
ASTM C1026	frost/freeze resistance	unaffected	unaffected
ISO 10545/13	chemical resistance	no visible alteration	LA $\geq \text{HB}$
ASTM C650	chemical resistance		A
ISO 10545/4	breaking strength	$\geq 35 \text{ N/ mm}^2$	48 N/ mm^2
ISO 10545/7	visible abrasion resistance		PEI IV PEI IV Happy
ASTM C1027	visible abrasion resistance	CLASS I-V	C.IV C.IV Happy
ISO 10545/14	resistenza alle macchie stain resistance	$\geq \text{CLASSE 3}$	5
ASTM C1378	stain resistance	$\geq \text{CLASSE 3}$	5
ANSI A137.1	aesthetic classes	V0-V4	V1



SCW TECHNICAL FEATURES

SUPERCLASSICA SCW	DIN EN 16165 anti-slip	DCOF dynamic coefficient of friction
NATURAL	R10	≥ 0,42
POLISHED	-	-
FLAMED	R10 A+B	≥ 0,42
HONED	R9	≥ 0,42
GROOVED	R10	≥ 0,42
HAMMERED	R11 A+B	≥ 0,42
HAPPY	R10	≥ 0,42
CHEVRON	R10	≥ 0,42

SCW PACKING

SUPERCLASSICA	pcs	m²	kg/box	box/pal	m²/pal	kg/pal	thickness
60x120 ^{24"} X48"	2	1,44	28,70	30	43,20	861,00	9 mm
60x60 ^{24"} X24"	3	1,08	21,00	40	43,20	840,00	9 mm
30x60 ^{12"} X24"	6	1,08	21,00	40	43,20	840,00	9 mm
7,5x120 ^{3"} X48"	8	0,72	13,97	50	36,00	698,50	9 mm
7,5x60 ^{3"} X24"	12	0,54	10,48	48	25,92	499,20	9 mm
Chevron	6	0,96	18,60	48	46,08	892,80	9 mm
Mosaic	11	-	19,20	-	-	-	9 mm

